



# SGM4812

## 132mW Differential Input, Stereo Audio Power Amplifier

---

### GENERAL DESCRIPTION

The SGM4812 is a stereo audio power amplifier with differential inputs. Operating on a single 5V power supply, it delivers 132mW of continuous RMS power per channel into a 16Ω loads with typically 0.1% THD+N. Amplifier gain is externally configured by means of two resistors per input channel and does not require external compensation.

The SGM4812 is designed to maximize audio performance in portable communication device applications such as mobile phone. The portable application requires audio power amplifier has minimum of external components and can operate from a single 2.7V to 5.5V power supply.

The SGM4812 features an externally controlled, active-high, micro-power consumption shutdown mode. Additionally, the SGM4812 features an internal thermal shutdown and short circuit protection mechanism.

The SGM4812 is available in Green MSOP-10 package. It operates over an ambient temperature range of -40°C to +85°C.

### FEATURES

- **Dual Channel, Differential Inputs**
- **132mW into 16Ω Load from 5V Power Supply at THD+N = 0.1% (Typical, per Channel)**
- **82mW into 32Ω Load from 5V Power Supply at THD+N = 0.1% (Typical, per Channel)**
- **2.7V to 5.5V Operation**
- **Thermal Shutdown and Short Circuit Protection**
- **Internal Pop Reduction Circuitry**
- **Internal Mid-Rail Generation**
- **Low Shutdown Current: 0.36μA (TYP) at 5V**
- **Shutdown Pin is Compatible with 1.8V Logic**
- **-40°C to +85°C Operating Temperature Range**
- **Available in Green MSOP-10 Package**

### APPLICATIONS

Portable Electronic Systems  
Notebook Computers  
Mobile Phones  
PDAs  
GPS

**PACKAGE/ORDERING INFORMATION**

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM4812	MSOP-10	-40°C to +85°C	SGM4812YMS10/TR	SGM4812 YMS10 XXXXX	Tape and Reel, 4000

NOTE: XXXXX = Date Code and Vendor Code.

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

Supply Voltage..... 6V  
 Input Voltage Range..... -0.3V to (V<sub>+</sub>) + 0.3V  
 Junction Temperature .....+150°C  
 Storage Temperature Range.....-65°C to +150°C  
 Lead Temperature (Soldering, 10s) .....+260°C  
 ESD Susceptibility  
 HBM..... 4000V  
 MM..... 400V

**RECOMMENDED OPERATING CONDITIONS**

Supply Voltage Range .....2.7V to 5.5V  
 Operating Temperature Range ..... -40°C to +85°C

**OVERSTRESS CAUTION**

Stresses beyond those listed may cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational section of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.


**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time.

**PIN CONFIGURATION**

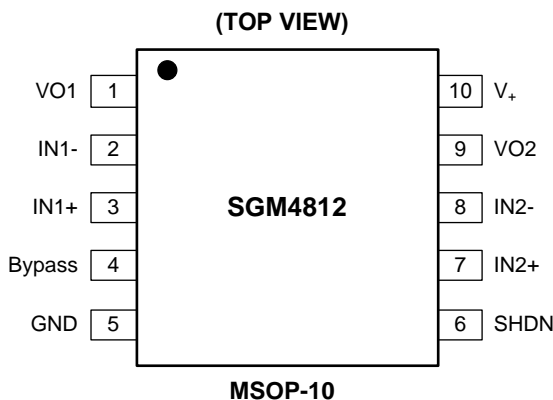


## ELECTRICAL CHARACTERISTICS

(T<sub>A</sub> = +25°C, unless otherwise specified.)


PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage	V <sub>+</sub>			2.7		5.5	V
Shutdown Current	I <sub>SD</sub>	V <sub>IN</sub> = 0V, V <sub>SHDN</sub> = V <sub>+</sub>	V <sub>+</sub> = 5V		0.36	2	μA
			V <sub>+</sub> = 3.3V		0.13	2	
			V <sub>+</sub> = 2.7V		0.07		
Output Offset Voltage	V <sub>OS</sub>	V <sub>IN</sub> = 0V		-15	2	15	mV
Quiescent Power Supply Current	I <sub>Q</sub>	V <sub>IN</sub> = 0V, I <sub>O</sub> = 0A	V <sub>+</sub> = 5V		1.86	2.6	mA
			V <sub>+</sub> = 3.3V		1.58	2.5	
			V <sub>+</sub> = 2.7V		1.50		
Shutdown Voltage Input High	V <sub>SDIH</sub>			1.8			V
Shutdown Voltage Input Low	V <sub>SDIL</sub>					0.4	
Power Supply Rejection Ratio	PSRR	V <sub>+</sub> = 3.2V to 3.4V			74		dB
		V <sub>+</sub> = 4.9V to 5.1V			70		
Output Power (per Channel)	P <sub>O</sub>	f = 1kHz, THD+N = 0.1%	V <sub>+</sub> = 5V	R <sub>L</sub> = 16Ω		132	mW
				R <sub>L</sub> = 32Ω		82	
			V <sub>+</sub> = 3.3V	R <sub>L</sub> = 16Ω		46	
				R <sub>L</sub> = 32Ω		34	
			V <sub>+</sub> = 3.0V	R <sub>L</sub> = 16Ω		34	
				R <sub>L</sub> = 32Ω		27	
			V <sub>+</sub> = 2.7V	R <sub>L</sub> = 16Ω		22	
				R <sub>L</sub> = 32Ω		21	
Total Harmonic Distortion + Noise	THD+N	P <sub>O</sub> = 60mW, V <sub>+</sub> = 5V, R <sub>L</sub> = 32Ω, f = 20Hz to 20kHz			0.07		%
Power Supply Rejection Ratio	PSRR	f = 217Hz, R <sub>L</sub> = 32Ω, Input grounded with 10Ω, (C <sub>BYPASS</sub> = 0.47μF)	V <sub>+</sub> = 5V		-55	dB	
			V <sub>+</sub> = 3.3V		-55		
			V <sub>+</sub> = 3.0V		-55		
			V <sub>+</sub> = 2.7V		-55		
		f = 1kHz, R <sub>L</sub> = 32Ω, Input grounded with 10Ω, (C <sub>BYPASS</sub> = 0.47μF)	V <sub>+</sub> = 5V		-71		
			V <sub>+</sub> = 3.3V		-71		
			V <sub>+</sub> = 3.0V		-71		
			V <sub>+</sub> = 2.7V		-71		
Wake-Up Time	T <sub>WU</sub>	V <sub>+</sub> = 5V, C <sub>BYPASS</sub> = 0.47μF			1.8		s
Signal-to-Noise Ratio	SNR	V <sub>+</sub> = 5V, R <sub>L</sub> = 32Ω, P <sub>O</sub> = 60mW, BW < 80kHz			-96		dB
Crosstalk	X <sub>TALK</sub>	V <sub>+</sub> = 5V, R <sub>L</sub> = 32Ω, P <sub>O</sub> = 60mW, f = 1kHz			-75		dB

TYPICAL PERFORMANCE CHARACTERISTICS


Small Signal Step Response

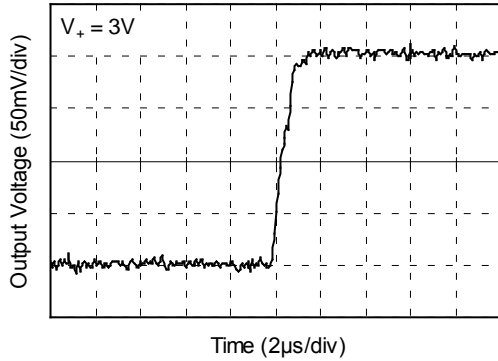


Small Signal Step Response

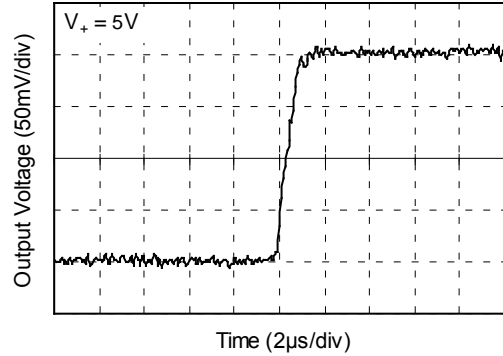


THD+N vs. Frequency

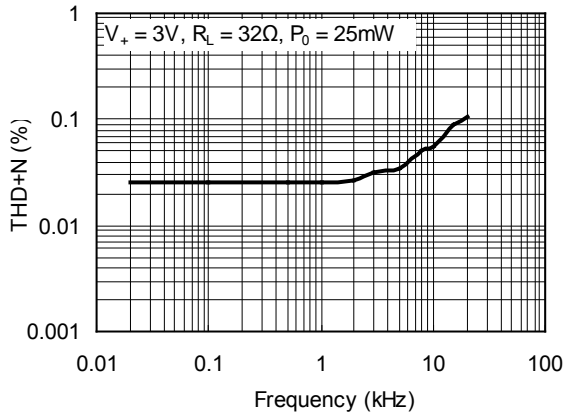


THD+N vs. Frequency

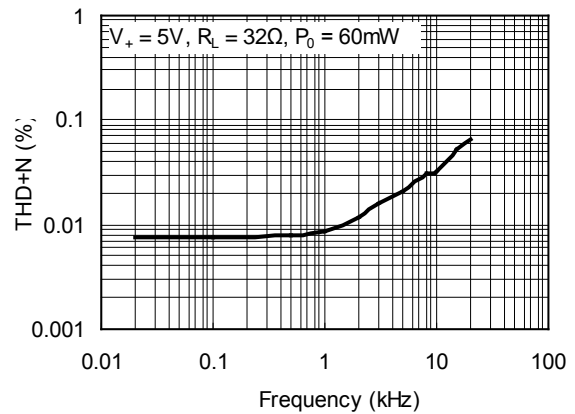







THD+N vs. Frequency

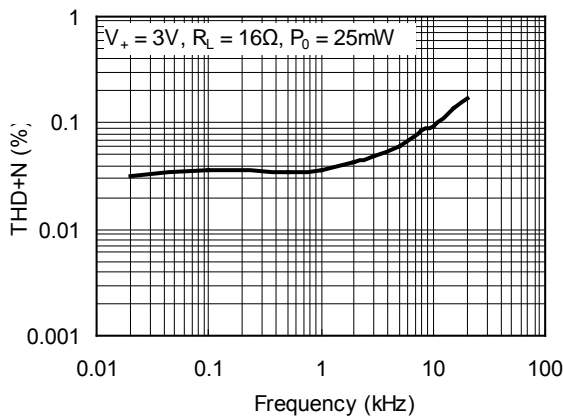







THD+N vs. Frequency

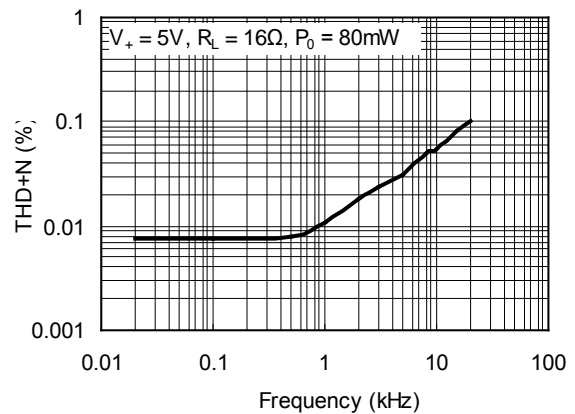




TYPICAL PERFORMANCE CHARACTERISTICS (continued)

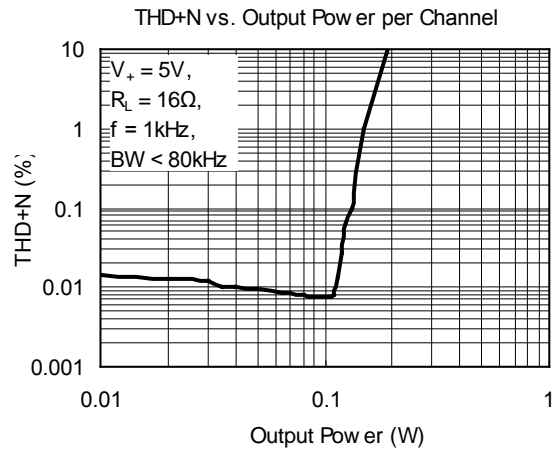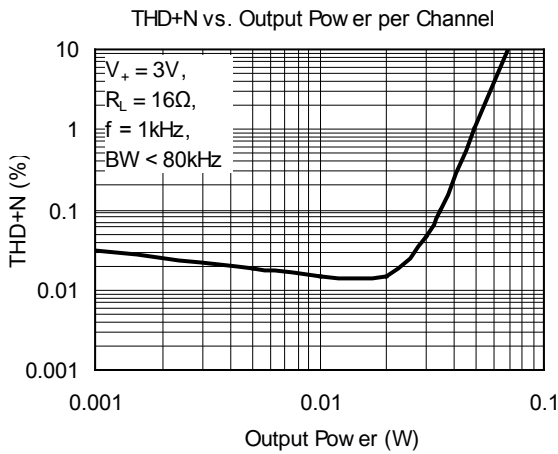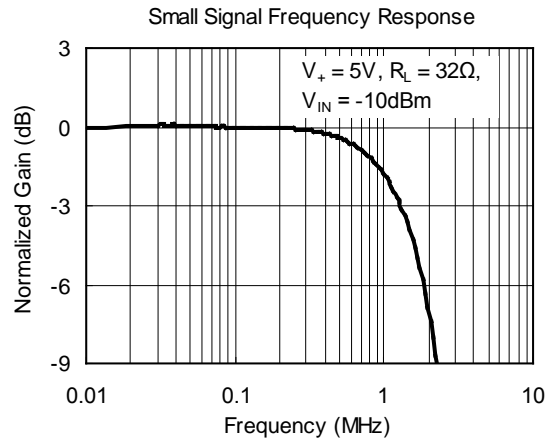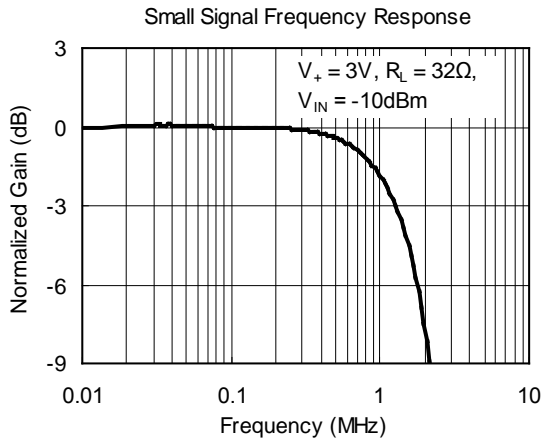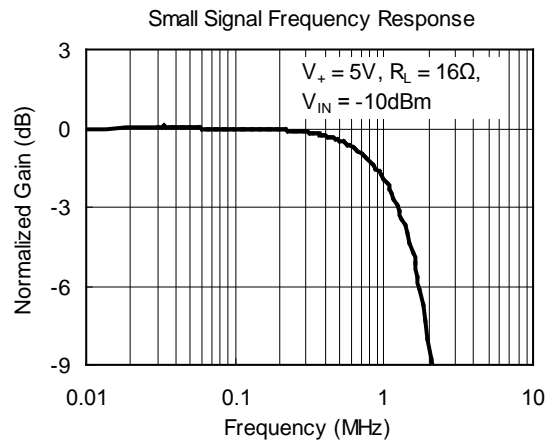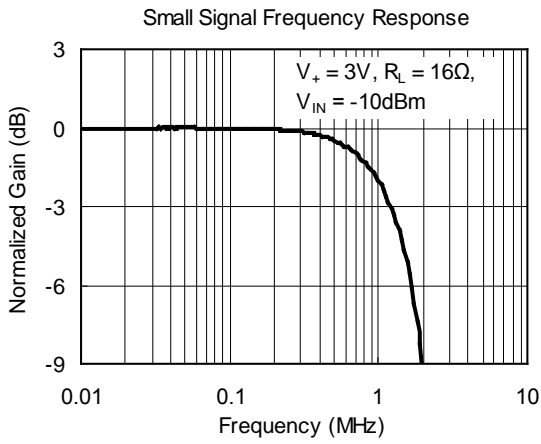


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

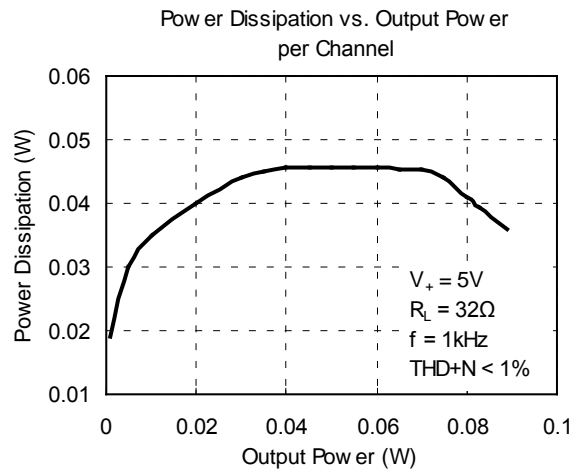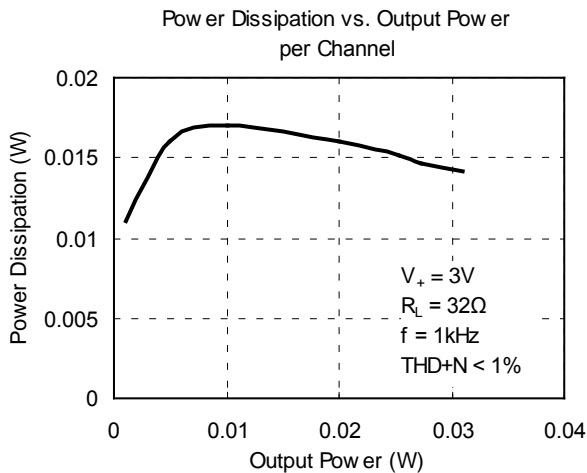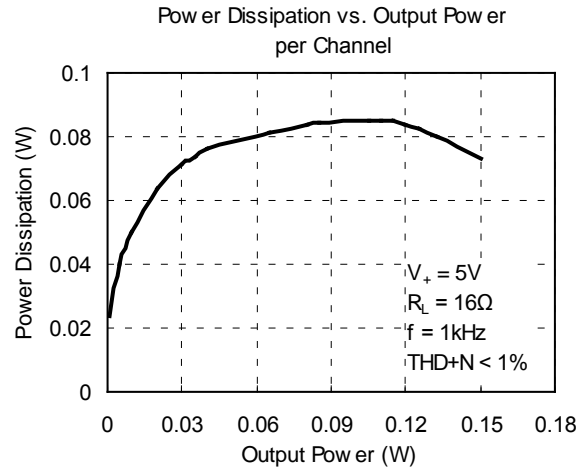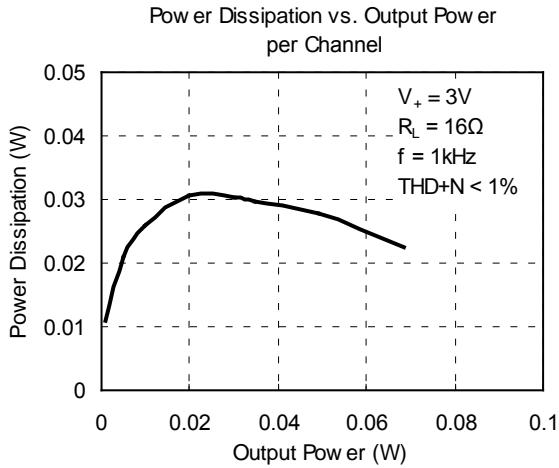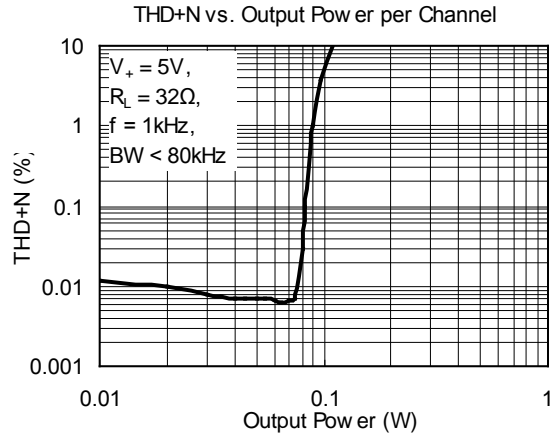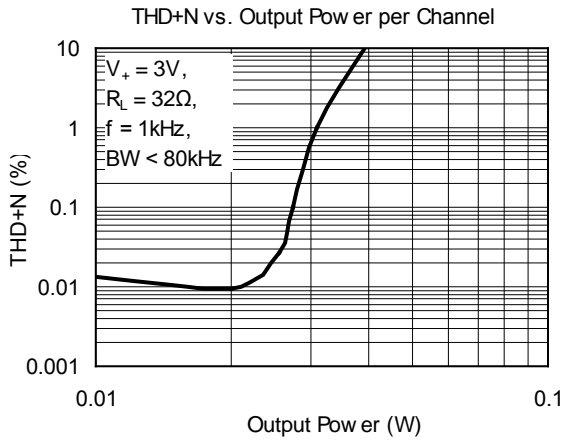

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

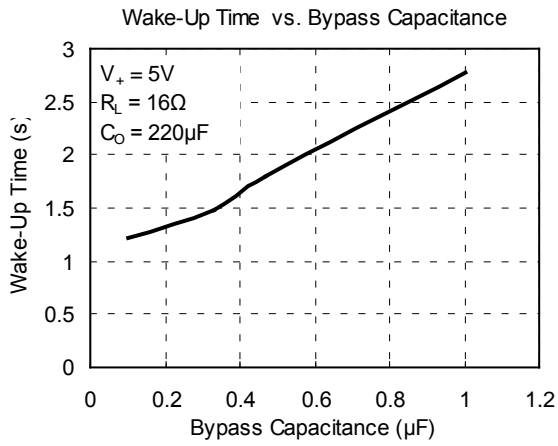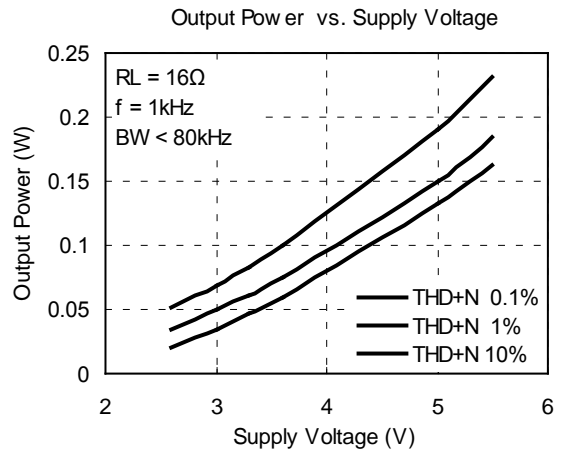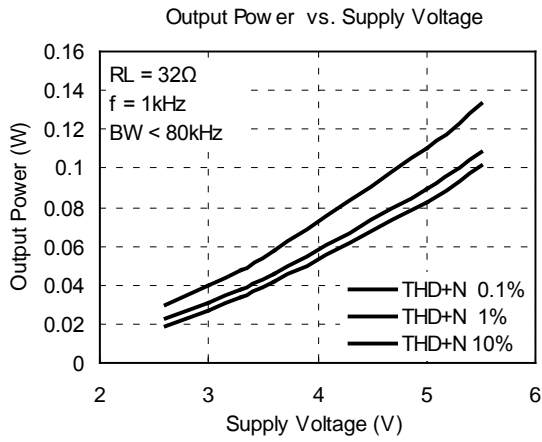

TYPICAL APPLICATION

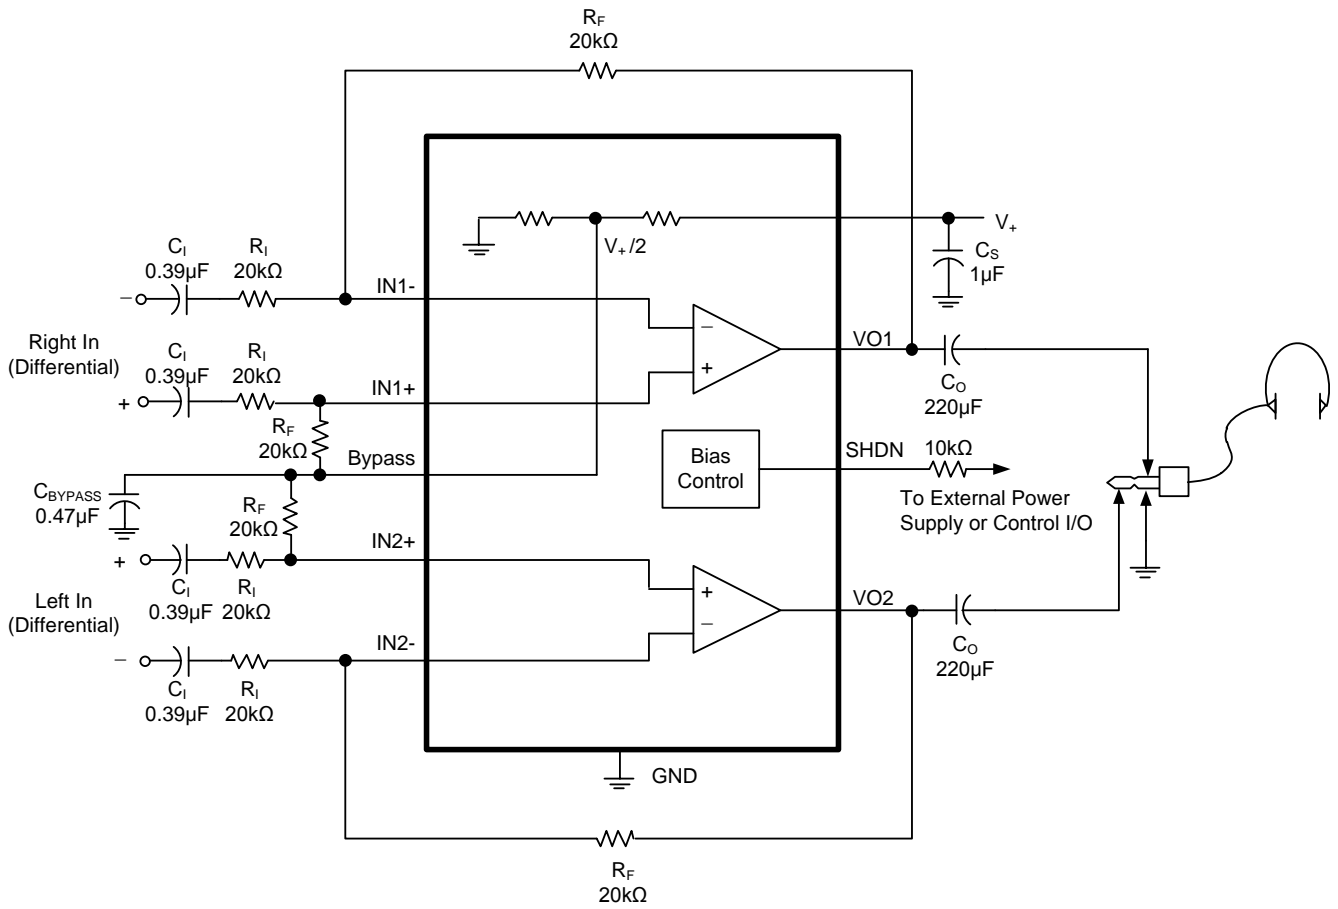

NOTE:

1. A 10kΩ resistor must be serially connected to SHDN pin.

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

MARCH 2017 – REV.A.3 to REV.A.4

Changed Packing Option..... 2

NOVEMBER 2012 – REV.A.2 to REV.A.3

Added note for Typical Application circuit ..... 8

MAY 2012 – REV.A.1 to REV.A.2

Added Tape and Reel Information ..... 10-11

AUGUST 2010 – REV.A to REV.A.1

Updated Electrical Characteristics ..... 3


Changes from Original (JUNE 2008) to REV.A

Changed from product preview to production data..... All




PACKAGE OUTLINE DIMENSIONS

MSOP-10

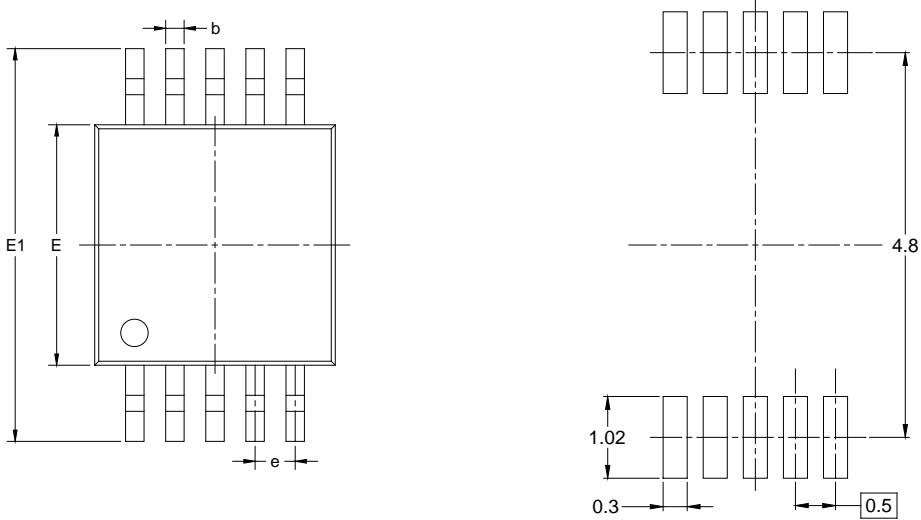

RECOMMENDED LAND PATTERN (Unit: mm)

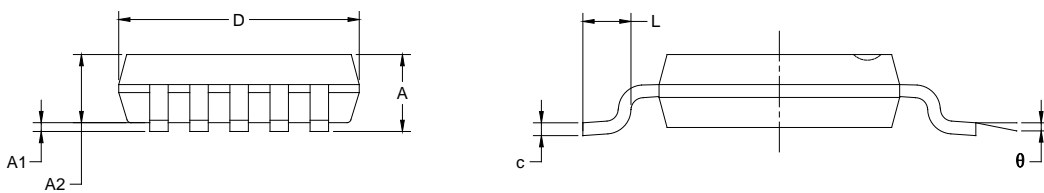


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.180	0.280	0.007	0.011
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.500 BSC		0.020 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°


# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

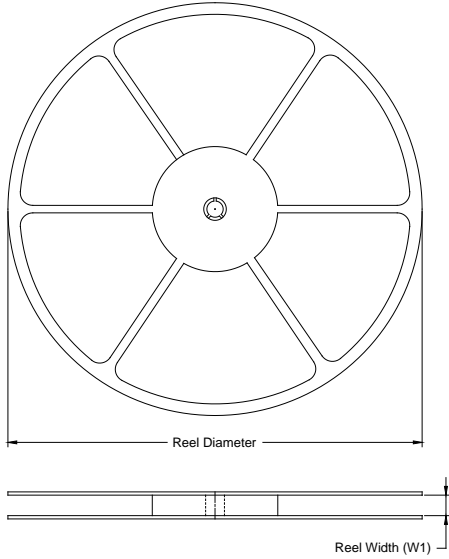

### TAPE DIMENSIONS

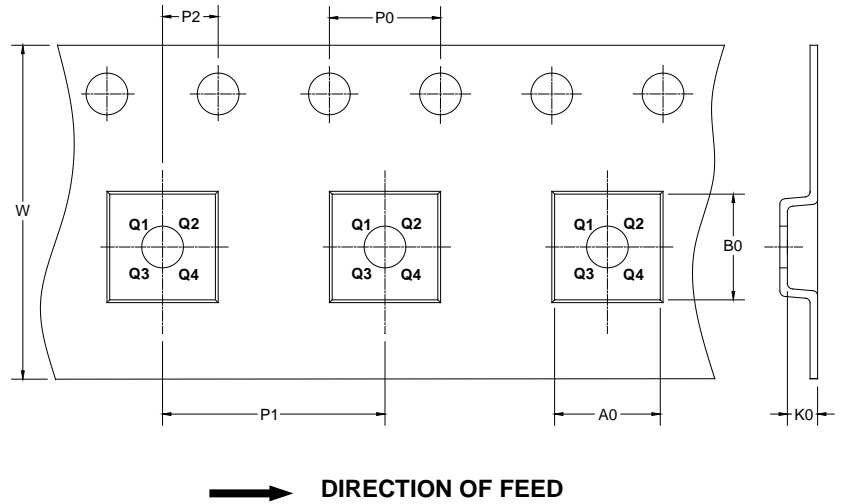

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
MSOP-10	13"	12.4	5.20	3.30	1.20	4.0	8.0	2.0	12.0	Q1

1000001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002