

**DARLINGTON COMPLEMENTARY
SILICON-POWER TRANSISTORS**

...designed for general-purpose power amplifier and low frequency switching applications

FEATURES:

- * Monolithic Construction with Built-in Base-Emitter Shunt Resistors.
- * High DC Current Gain -
hFE = 3500 (typ) @ $I_C = 5.0$ A


**Boca Semiconductor Corp.
BSC**

MAXIMUM RATINGS

Characteristic	Symbol	2N6050 2N6057	2N6051 2N6058	2N6052 2N6059	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	100	V
Collector-Base Voltage	V_{CBO}	60	80	100	V
Emitter-Base Voltage	V_{EBO}	5			V
Collector Current - Continuous -Peak	I_C	12 20			A
Base Current	I_B	0.2			A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derated above 25°C	P_D	150 0.857			W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200			$^\circ\text{C}$


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.17	$^\circ\text{C/W}$

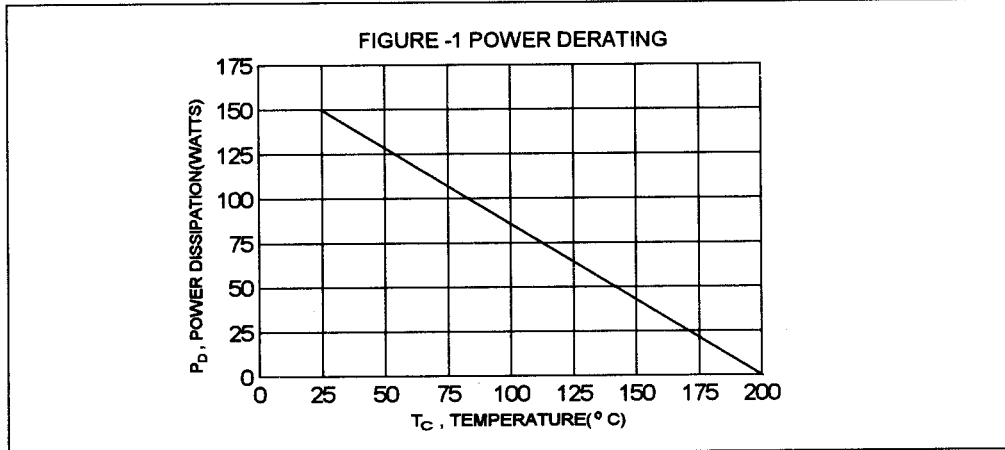


PNP NPN
2N6050 2N6057
2N6051 2N6058
2N6052 2N6059

**DARLINGTON
12 AMPERE
COMPLEMENTARY SILICON
POWER TRANSISTORS
60-100 VOLTS
150 WATTS**



TO-3



**PIN 1.BASE
2.EMITTER
COLLECTOR(CASE)**

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage (1) ($I_C = 100\text{ mA}$, $I_B = 0$) 2N6050, 2N6057 2N6051, 2N6058 2N6052, 2N6059	$V_{CE(sus)}$	60 80 100		V
Collector Cutoff Current ($V_{CE} = 30\text{ V}$, $I_B = 0$) ($V_{CE} = 40\text{ V}$, $I_B = 0$) ($V_{CE} = 50\text{ V}$, $I_B = 0$) 2N6050, 2N6057 2N6051, 2N6058 2N6052, 2N6059	I_{CEO}		1.0 1.0 1.0	mA
Collector Cutoff Current ($V_{CE} = \text{Rated } V_{CE0}$, $V_{BE(off)} = 1.5\text{ V}$) ($V_{CE} = \text{Rated } V_{CE0}$, $V_{BE(off)} = 1.5\text{ V}$, $T_c = 150^\circ\text{C}$)	I_{CEX}		0.5 5.0	mA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)	I_{EBO}		2.0	mA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 6.0\text{ A}$, $V_{CE} = 3.0\text{ V}$) ($I_C = 12\text{ A}$, $V_{CE} = 3.0\text{ V}$)	hFE	750 100	18000	
Collector-Emitter Saturation Voltage ($I_C = 6.0\text{ A}$, $I_B = 24\text{ mA}$) ($I_C = 12\text{ A}$, $I_B = 120\text{ mA}$)	$V_{CE(sat)}$		2.0 3.0	V
Base-Emitter On Voltage ($I_C = 6.0\text{ A}$, $V_{CE} = 3.0\text{ V}$)	$V_{BE(on)}$		2.8	V
Base-Emitter Saturation Voltage ($I_C = 12\text{ A}$, $I_B = 120\text{ mA}$)	$V_{BE(sat)}$		4.0	V

DYNAMIC CHARACTERISTICS

Current-Gain-Bandwidth Product (2) ($I_C = 5.0\text{ A}$, $V_{CE} = 3.0\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	4.0		MHz
Small-Signal Current Gain ($I_C = 5.0\text{ A}$, $V_{CE} = 3.0\text{ V}$, $f = 1.0\text{ KHZ}$)	h_{fe}	300		


(1) Pulse Test: Pulse width $\leq 300\text{ us}$, Duty Cycle $\leq 2.0\%$ (2) $f_T = |h_{fe}| \cdot f_{test}$

Boca Semiconductor Corp.


BSC

<http://www.bocasemi.com>

SWITCHING TIME

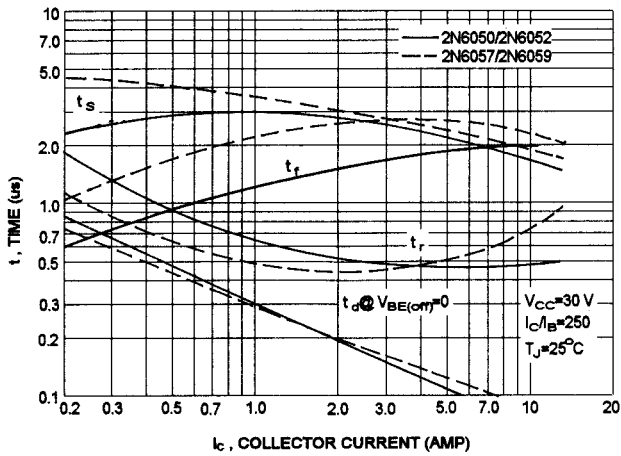


CAPACITANCES

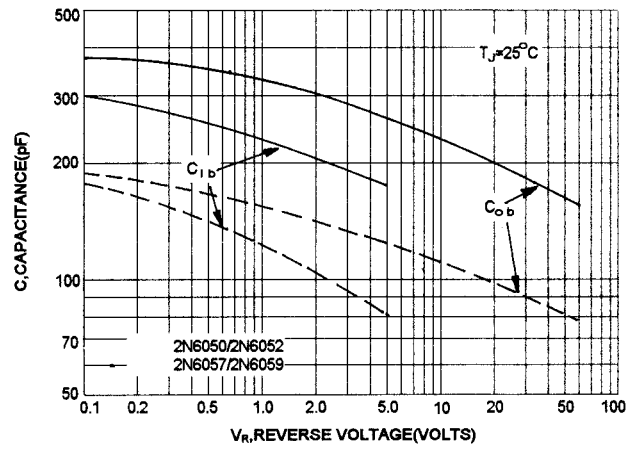


ACTIVE-REGION SAFE OPERATING AREA (SOA)

2N6050, 2N6057

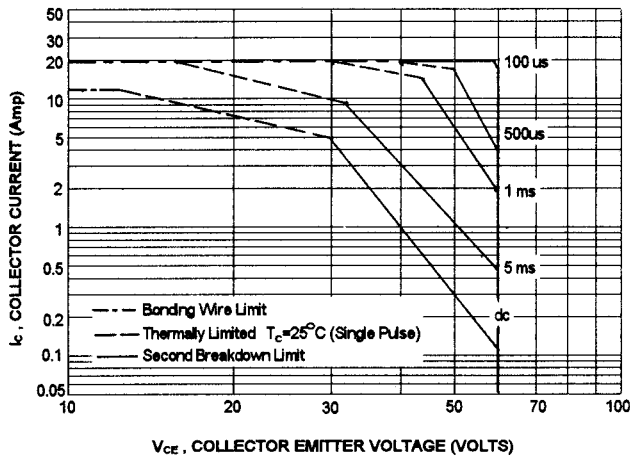


2N6051, 2N6058

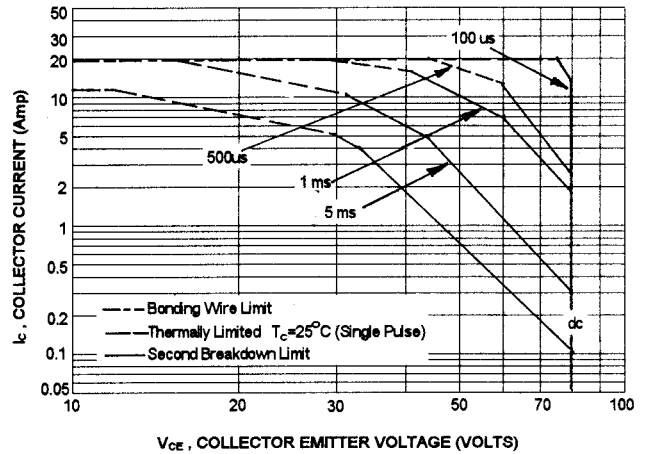

ACTIVE-REGION SAFE OPERATING AREA (SOA)


2N6052, 2N6059

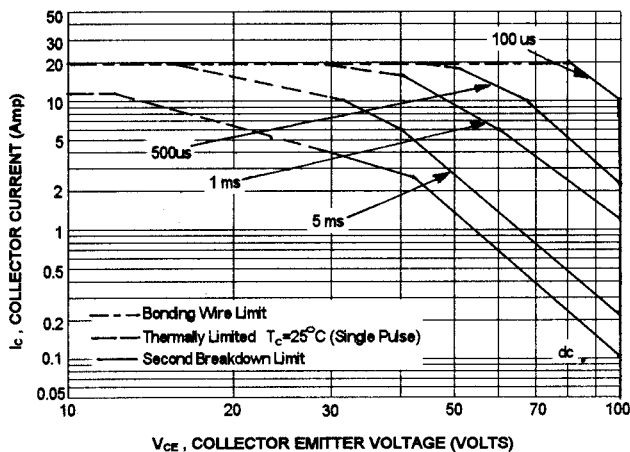


There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_c - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{J(PK)}=200^\circ C$; T_c is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 200^\circ C$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.


PNP 2N6050,2N6051,2N6052
DC CURRENT GAIN

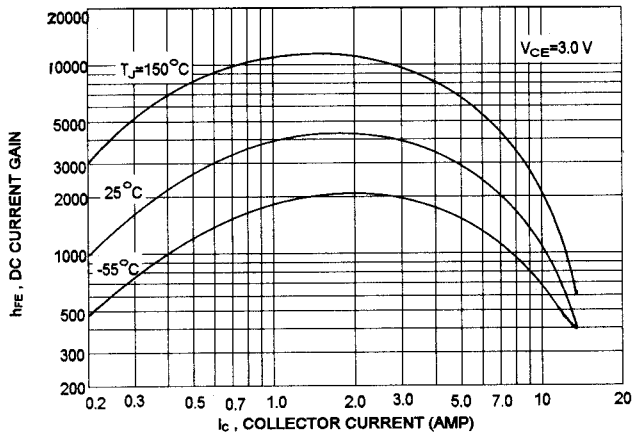


NPN 2N6057,2N6058,2N6059
DC CURRENT GAIN

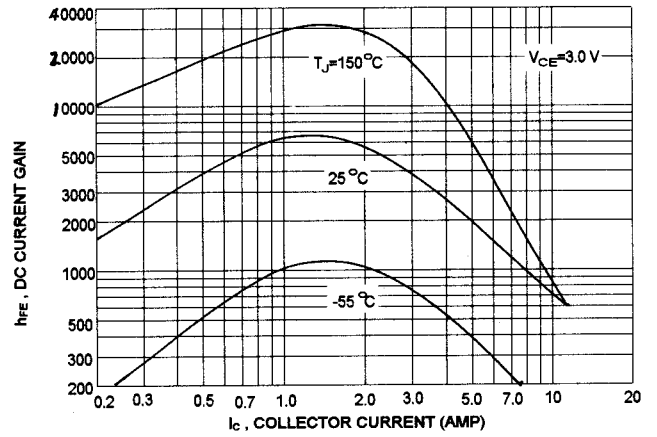


COLLECTOR SATURATION REGION

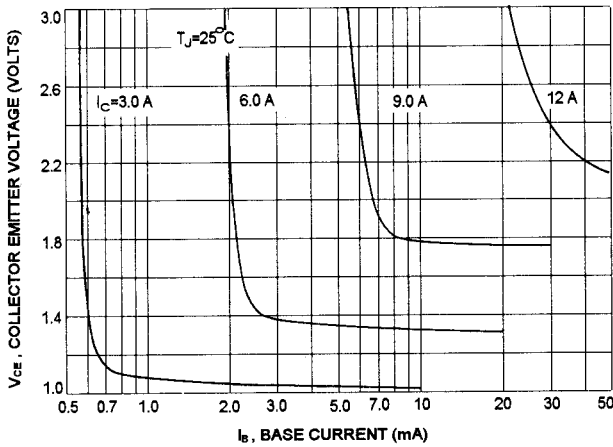


COLLECTOR SATURATION REGION

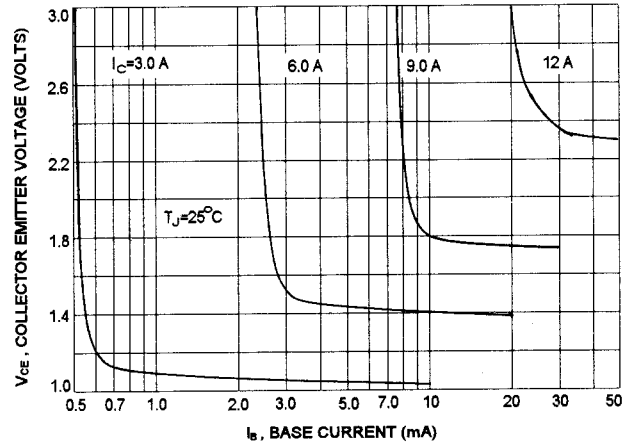

"ON" VOLTAGES

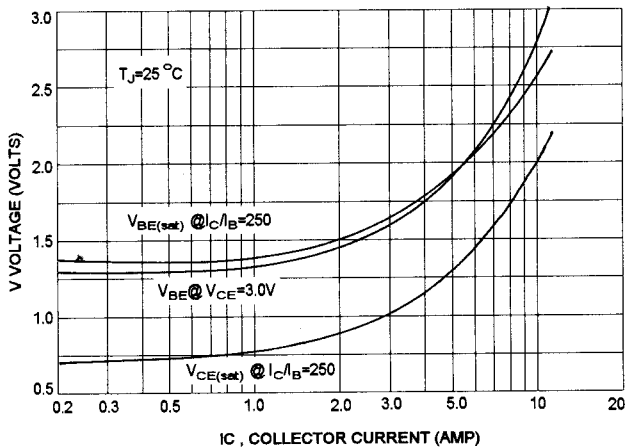

"ON" VOLTAGES

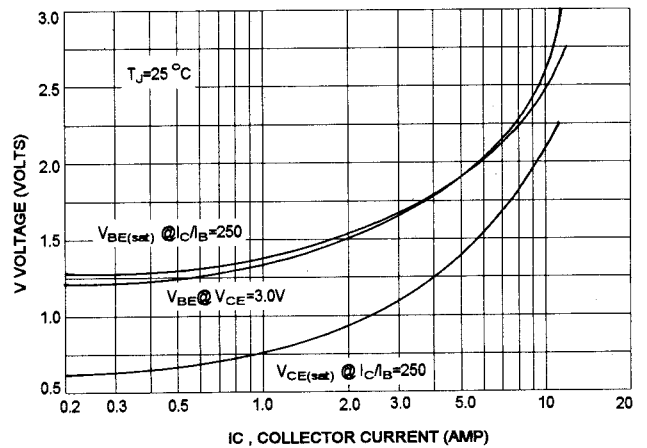

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.